


SOLOIST-2S MPEG 2 Playback System

Audio, Video and Communications Connections

Front View



Rear View

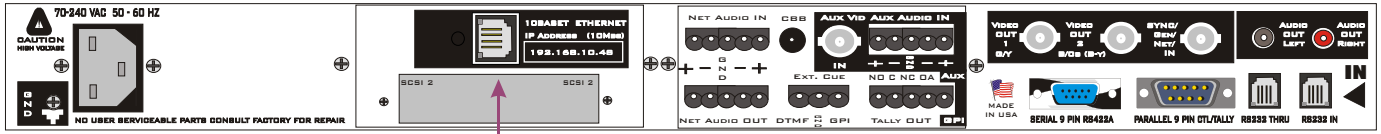


Ethernet In
Default IP 192.168.10.48

Audio In from
Network Source

Video In from
Auxiliary Source

Audio In from
Auxiliary Source

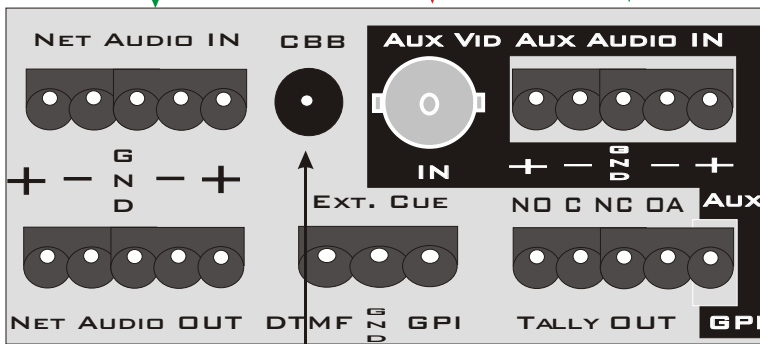

Audio Out to Modulator
Power OFF relay bypass


Not Used for LO

Auxiliary GPI Input

Video In from Network Source
MUST BE CRYSTAL CONTROLLED

Video Out to Modulator
Power OFF relay bypass

Audio Preview
MPEG Only

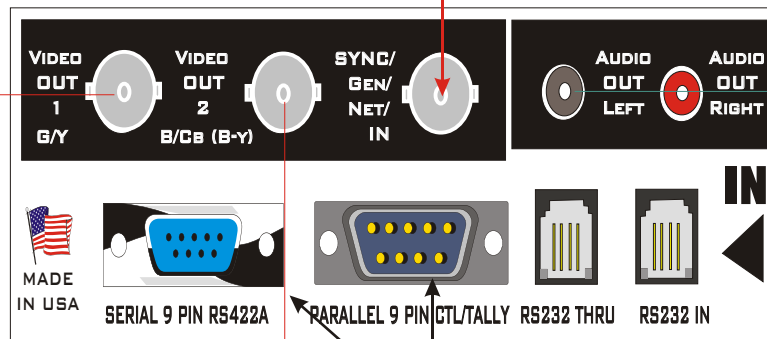

Video Preview

**DO NOT connect Parallel
and RS422 Ports**

From PC
Comm Port
Default 38400
Baud, 8 Data,
1 Stop, Odd
Parity

