

**Edje Quick Connect Guide**

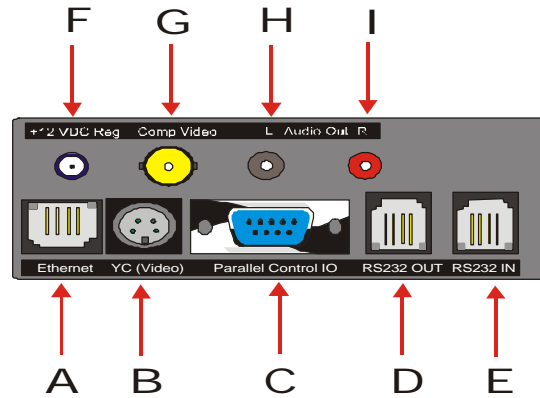
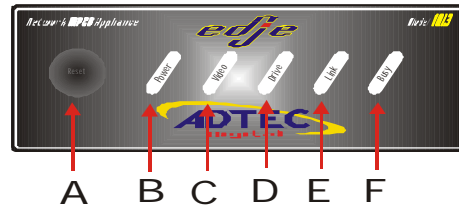


Table 1.0

Connection	Label	Description	Type
<b>Ethernet 10 BASE T</b>	A	Connect to a HUB or directly to a PC. <u>Default TCP IP properties for all Adtec units:</u> IP Address: <b>192.168.10.48</b> Sub Net Mask: <b>255.255.255.0</b> Mode: <b>Server</b> User Name: <b>ADTEC</b> Password: <b>NONE</b> A DOS Telnet session can be initiated using the properties above.	<b>RJ45</b>
<b>VIDEO OUT YC</b>	B	YC (SVHS) analog video output signal.	<b>4 Pin DIN</b>
<b>Parallel Port</b>	C	TTL control and status Tally IO. Simple Play Stop, Rewind and Next default control. Sophisticated control and port mapping possible through the use of DVC files.	<b>DB9 Male</b>
<b>RS232 IN</b>	D	RS232 Serial communications port. <u>Default serial RS 232 properties for all Adtec units:</u> Baud: <b>38,400</b> Data Bits: <b>8</b> Stop Bit: <b>1</b> Parity: <b>Odd</b> Unit Name: <b>edje</b> (The asterisk (*) symbol can be used if only 1 unit is connected to a serial port)	<b>RJ11</b>
<b>RS232 THRU</b>	E	Serial communications port loop for connecting multiple units to a single communications port or modem.	<b>RJ11</b>
<b>12 VDC Power</b>	F	Requires regulated +12 VDC input.	<b>2.5 MM Locking</b>
<b>VIDEO OUT Composite</b>	G	Composite analog video output signal.	<b>BNC</b>
<b>AUDIO OUT L</b>	H	Analog audio out Left channel.	<b>RCA</b>
<b>AUDIO OUT R</b>	I	Analog audio out Right channel.	<b>RCA</b>

The front panel of the Edge provides simple intuitive LED status.



**Table 1.1**

Label	Description
<b>A</b>	Reset switch. Must be held for one second to initiate reset.
<b>B</b>	Power LED, illuminates when DC power is applied to unit.
<b>C</b>	Video LED, illuminates during video playback or frame still.
<b>D</b>	Drive LED, illuminates during hard drive activity.
<b>E</b>	Link LED, illuminates when the electrical 10 Base T Ethernet connection is made correctly to a hub, switch or PC.
<b>F</b>	Busy LED illuminates during Ethernet activity.

Contact Information:

Sales: 1-615-256-6619

Sales International: 1-904-394-0389

Customer Service: 1-615-256-6619

Available Monday through Friday 9 AM to 5 PM Central Standard Time (CST). Priority support plans available; please e-mail [Adtec Support](mailto:Adtec_Support) for more information on available plans and pricing.

Web: [www.adtecinc.com](http://www.adtecinc.com)

Thank you for choosing Adtec and the edje for your MPEG 2 Playback and control needs.